

# Waterbed.com.au Draw Base Installation Guide

## Ph 1800 124 444



1. Draw bases are made of two piece system with the draws off set from the head end to allow for side tables. Two boards one matching the base in colour and a plain board with 4 corner extrusions complete the package (3 X sections are supplied with a king base).



2. The corners are connected by sliding corner extrusion into the slots in the boards; the head end is usually a plain board with the foot matching the draw sided in colour.



3. To position the base the gap between the base and wall / headboard should measure 140mm. To square up the base then measure diagonally both ways and adjust until the measurement is the same. (King Pictured).




4. Queen frames do not have the gap a king base does and do not require the 3 X sections as in a king. (Queen picture)



5. Place the deck board on the base so as the overlap is even top and bottom, remove the deck and adjust the base position if needed. As the overlap has to be even.



6. With both decking boards in position check the overlap is even on both sides and the hole for the heater cord is at the head end. at this stage the decking may shift when bumped, re check the position prior to the final filling of the bed.

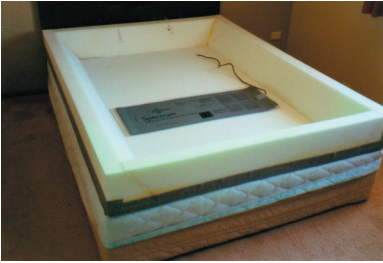

7. Place the top section on the base, fold down the cover, and remove the liner so the heater board and then the heater can be positioned “NEVER INSTALL A HEATER UNDER THE FOAM BATH” The cord is passed through one of the two holes in the foam at the head end, then through one of the holes in the decking board.



8. Replace the liner and fold the base cover back up. Install the mattress making sure it is square in the frame by removing the cap and squaring up the corners in the frame. Remove any wrinkles in the mattress by gently pulling the sides into position.



9. Check you have not moved the decking board and the bed is square before filling, never overfill a bed, the level should be  $\frac{1}{4}$  inch below the top of the foam. Add your water treatment and remove any air before capping & zipping on the cover. Air will be need to be removed a few days later after the baffle has had time to fully expand.